NATURAL-EFFECT PROTECTIVE WAX

TERRACOTTA, QUARRY TILES, NATURAL STONE, UNPOLISHED AGGLOMERATES, TUFF, RESIN



WHAT IT'S FOR

- For floor maintenance and matt finish for treatments of terracotta, quarry tiles, tumbled marble and natural stone floors.
- The ideal finishing coat after the application of a water-based water-proofing sealer.
- Ideal on interior walls made of bricks and natural stones, on decorative coverings made of gypsum, manufactured stone and concrete to prevent flaking and strengthen the surface.

ADVANTAGES

- Provides natural finish.
- Highly concentrated: can be diluted according to requirements.
- Can be polished to achieve a satin effect.
- Completely removable.
- Has a high self-levelling capacity.
- Dirt and dust repellent.
- The **MATT**-based finish retains a breathability of at least 90% compared to the untreated material

HOW TO USE IT

Dilution: either undiluted or diluted according to requirements.

For the protection of floors and bare walls:

Dilute **MATT** slightly to make it more fluid and easier to apply, by adding 200 ml of water per litre of product. On a clean and dry surface, apply one even coat of **MATT** using fleece (wall brush).

Wait until completely dry (about an hour) and then apply a second coat in the opposite direction to the first (i.e. horizontal if previously applied vertically or vice-versa). The floor can be walked on after one hour. For a greater sheen, buff with a floor polishing machine or a wool cloth. If treating terracotta and highly absorbent natural stone (limestone, sandstone, old quarries, rough quartzite), we recommend a base coat of a water-proofing product such as **FOB XTREME** or **W68.**

Renewal of the finish (every 2-3 months): after cleaning the surface with a diluted solution of **CLEANER PRO** (1:200), apply **MATT** by diluting 500 ml of product in 5 litres of water. The floor can be walked on once dry. Restoration of the protection: remove the wax from the surface using the PS87 PRO detergent, diluted 1:5. Rinse the surface.


Once the floor is dry, apply the wax slightly diluted (200 ml of water per litre of product) using a fleece pad, cloth or other applicator. The floor can be walked on once dry.

For Anti-flaking treatment: apply an even coat of undiluted **MATT** to the dry floor using a brush. The treated surface will be dry after approximately one hour.

CLEANING OF TOOLS: clean with water after use.

For ordinary maintenance: use a diluted solution of CLEANER PRO (1:200)

Caution:
Do not walk on floor while it's drying and do not repeat application on treated areas which are not yet dry.
*To remove this wax, use the specific wax-remover **PS87 PRO**.*
Do not use the product on external surfaces, in damp environments and where water puddles may form (bathrooms, showers).
The product can change the appearance of the material, first spot test a small surface area to check for any changes.

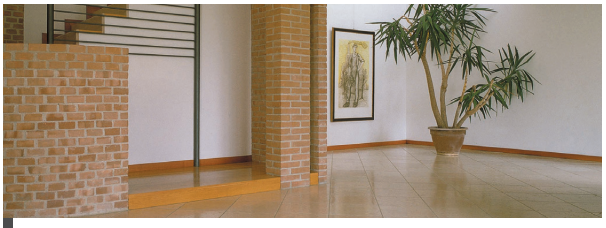

COVERAGE

COVERAGE (1 litre):	
Terracotta	30 m²
Stone	30-40 m²

Coverage shown is indicative and refers to single coats

Packaging

1 litre: boxes of 12.
5 litres: boxes of 4.

WARNINGS
- Keep out of reach of children.
- Do not disperse into the environment after use.
- The product is sensitive to frost: store it as indicated on the label.

TEMPERATURES
Storage temperature: from 5° to 30° C.
This product must be applied to surfaces with temperature between 10°C and 30°C.