



NATURAL-EFFECT PROTECTIVE WAX

**TERRACOTTA, QUARRY TILES, NATURAL STONE,
UNPOLISHED AGGLOMERATES, TUFF, RESIN**



WHAT IT'S FOR

- For floor maintenance and matt finish for treatments of terracotta, quarry tiles, tumbled marble and natural stone floors
- The ideal finishing coat after the application of a water-based water-proofing sealer
- Ideal on interior walls made of bricks and natural stones, on decorative coverings made of gypsum, manufactured stone and concrete to prevent flaking and strengthen the surface

ADVANTAGES

- Provides natural finish
- Highly concentrated: can be diluted according to requirements
- Can be polished to achieve a satin effect
- Completely removable
- Has a high self-levelling capacity
- Dirt and dust repellent
- The **MATT**-based finish retains a breathability of at least 90% compared to the untreated

HOW TO USE IT

Dilution: either undiluted or diluted according to requirements.

For the protection of floors and bare walls: Dilute **MATT** slightly to make it more fluid and easier to apply, by adding 200 ml of water per litre of product. On a clean and dry surface, apply one even coat of **MATT** using fleece (wall brush). Wait until completely dry (about an hour) and then apply a second coat in the opposite direction to the first (i.e. horizontal if previously applied vertically or vice-versa). The floor can be walked on after one hour. For a greater sheen, work with a floor polishing machine or a wool cloth. If treating terracotta and highly absorbent natural stone (limestone, sandstone, old quarries, rough quartzite), we recommend a base coat of a water-proofing product such as **FOB XTREME** or **W68**.

Renewal of the finish (every 2-3 months): after cleaning the surface with a diluted solution of **CLEANER PRO** (1:200), apply **MATT** by diluting 500 ml of product in 5 litres of water. The floor can be walked on once dry.

Restoration of the protection: remove the wax from the surface using the **PS87 PRO** detergent, diluted 1:5. Rinse the surface. Once the floor is dry, apply the wax slightly diluted (200 ml of water per litre of product) using a fleece pad, cloth or other applicator. The floor can be walked on once dry.

For Anti-flaking treatment: apply an even coat of undiluted **MATT** to the dry floor using a brush. The treated surface will be dry after approximately one hour.

CLEANING OF TOOLS: clean with water after use.

For ordinary maintenance: use a diluted solution of **CLEANER PRO** (1:200)


Caution:

Do not walk on floor while it's drying and do not repeat application on treated areas which are not yet dry.

*To remove this wax, use the specific wax-remover **PS87 PRO**.*

Do not use the product on external surfaces, in damp environments and where water puddles may form (bathrooms, showers).

The product can change the appearance of the material, first spot test a small surface area to check for any changes.

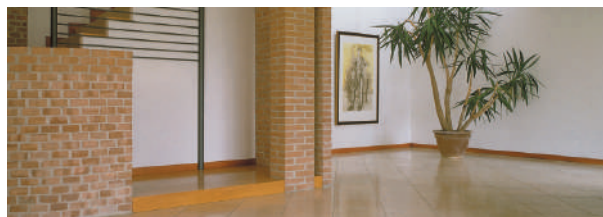

COVERAGE

COVERAGE (1 litre):

Terracotta 30 m²

Stone 30-40 m²

Coverage shown is indicative and refers to single coats

Packaging

1 litre: boxes of 12.

5 litres: boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.
- The product is sensitive to frost: store it as indicated on the label.

TEMPERATURES

Storage temperature: from 5° to 30° C.
This product must be applied to surfaces with temperature between 10°C and 30°C.