


END-OF-WORK CLEANING

**PORCELAIN TILES, GLAZED CERAMIC
TILES, ACID-RESISTANT STONE SURFACES,
TERRACOTTA, QUARRY TILES**



Buffered acid: treats the material in a controlled and effective manner.

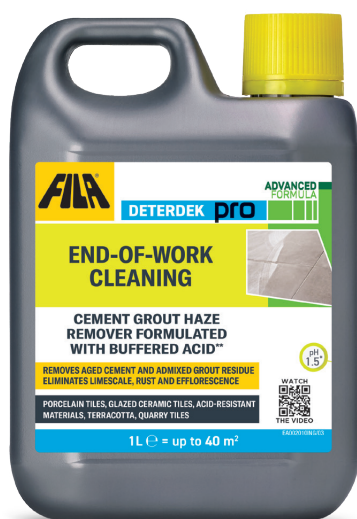

COVERAGE

COVERAGE AND DILUTION (1 litre):

Terracotta 1:5	10-20 m²
Porcelain tiles 1:5	40 m²
Acid-resistant materials 1:5-1:10	20-35 m²

Coverage shown is indicative

Packaging

1 litre: boxes of 12.
5 litres: boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

TEMPERATURES

Storage temperature: from 5° to 30° C.
The product should be applied to materials with temperature between 5° and 30° C.

WHAT IT'S FOR

- Detergent for end-of-installation washing
- Removes post-application deposits and building-site dirt.
- Eliminates saline efflorescences from terracotta.
- Eliminates lime-scale from floors, showers, sanitary fittings.
- Thoroughly cleans outdoor floors.
- It removes deposits and cleans at the same time because it also contains surfactants.
- Effective against rust stains.
- It helps to remove signs of engobing on ceramic and porcelain tiles surfaces

ADVANTAGES

- Buffered acid, does not produce harmful fumes: replaces hydrochloric acid
- Does not alter the appearance or colour of materials
- It cleans but does not attack.
- Does not affect grouting.
- Does not ruin profiles or items in aluminium and steel (kitchen hoods, pipes...).
- Can be used on many surfaces, terracotta, porcelain and ceramic tiles, and acid resistant stone.
- Has many functions: it can clean and remove deposits according to dilution.
- It is also effective in removing admixed grout residues.

HOW TO USE IT

Dilution:

between 1:5 and 1:10 according to the amount of dirt to be removed.
Dilute 1:3 to remove grout with additives.

Application:

For post-installation cleaning and end-of-work cleaning:
wet the surface well with water before washing. Then use **DETERDEK PRO** diluted at a ratio of 1:5 or 1:10 (1 litre of product in 5 or 10 litres of water).
Apply the solution a few square metres at a time, then add, allow contact time of 5 minutes, then work with a single-disc machine or large brush.
Remove any residues using a cloth or liquid vacuum cleaner and rinse with abundant water. Should any stubborn dirt residues remain, repeat the wash with more concentrated solutions.

For routine maintenance of outdoor surfaces with evident signs of ageing (smog, dust, etc.):

Dilute 1 litre of product in 10 litres of water. Then follow the same application procedures described above.

Caution:

*Do not use on polished marble and acid sensitive materials.
Test the product on a small, inconspicuous area of the surface or loose sample to ensure the material's resistance to the product prior to full application.
For items in aluminium, follow the instructions and use a soft sponge.*